Declassified and Approved For Release 2012/09/13 : CIA-RDP78-03535A000500070085-5

Parts List

C1, C4, 100 pf. Ceramic Cap'y
C5, C7
C2, C3, C6, .01 ufd. Disc Ceramic
C8, C9
C10, C11 4 ufd.; 350 volt Elect capacitor
C12, C13 Value is dependent
C14, on freq. of tank
L1 Hand wound 1/4" dia. Core about 35 turns #32 Enamel wire
L5 1 mh., 4 pi. RFC
L2, L3, L4 50 uh., RFC
R1 1 Megohm 1/2 w.
R2 100 to 150 ohm 1/2 w
R3 15K, 1/2 w.
R4 6.8K, 1/2 w
R5 3.3 Meg., 1/2 w
R6, R8 10K, 1/2 w
R7 100K, 1/2 w
R9 5.6K, 1/2 w
R10 27 ohms 1/2 w
R11 330 ohms 1/2 w
R12 1250 ohms Linecord Resistor
SR-1 Rectifier, Selenium, 250 volt, 50 milliamp
V1, V2, V3 GL-5899
X1 FT-243 type frequency equal to signal plus 1450 kc.
S1 DPDT slide type switch

This document is part of an integrated file. If separated from the file it must be subjected to individual systematic review.

Declassified and Approved For Release 2012/09/13 : CIA-RDP78-03535A000500070085-5

Declassified and Approved For Release 2012/09/13 : CIA-RDP78-03535A000500070085-5

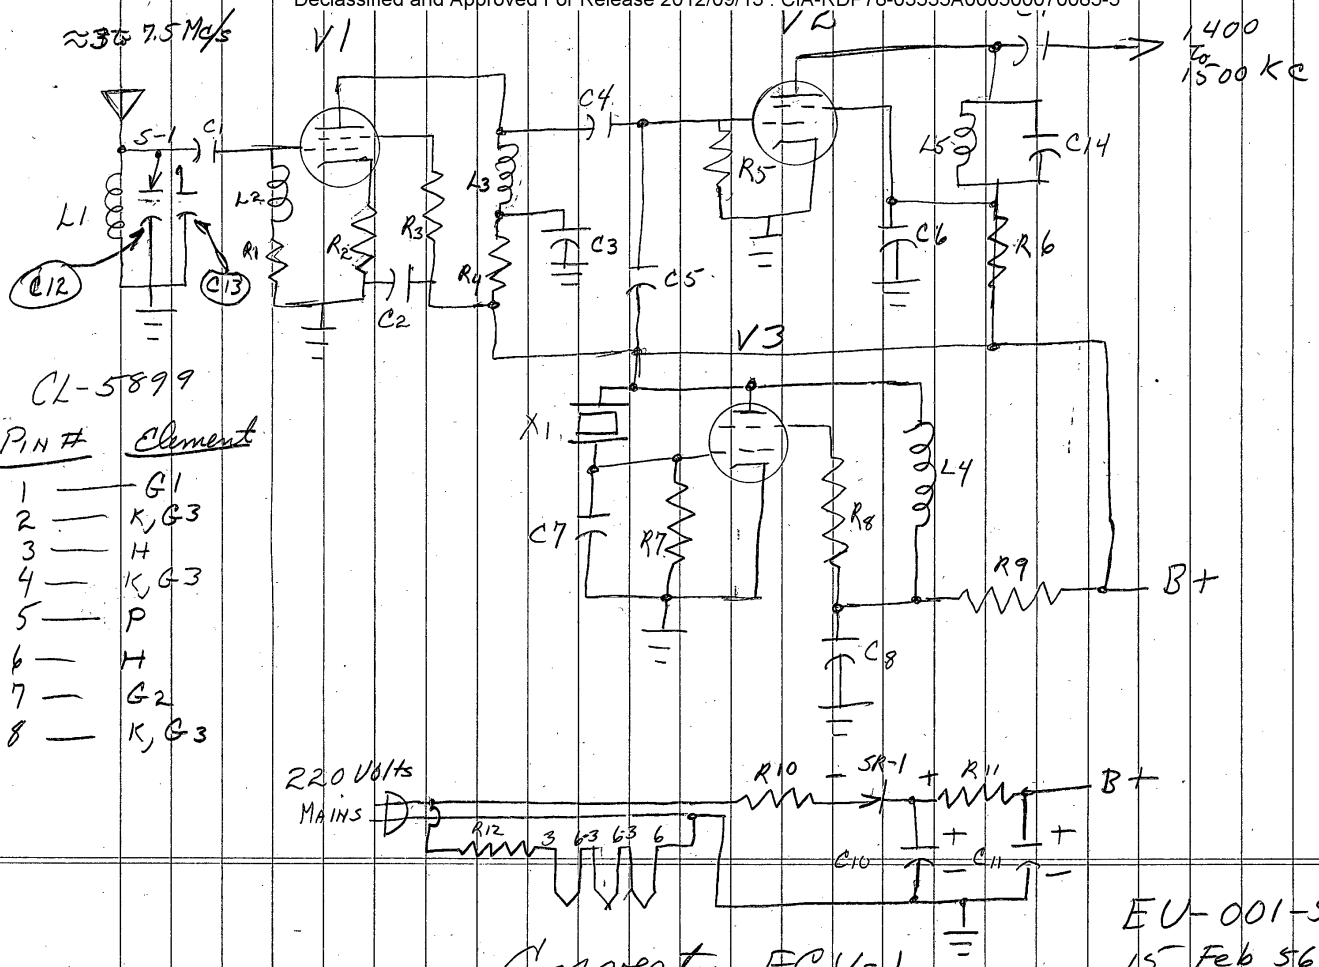

CL-5899

Pin #	Element
1	G1
2	K, G3
3	H
4	K, G3
5	P
6	H
7	G2
8	K, G3

Converter FCV-1

EV-001-56
15 Feb 56

This document is part of an integrated file. If separated from the file it must be subjected to individual systematic review.

Declassified and Approved For Release 2012/09/13 : CIA-RDP78-03535A000500070085-5